

PRODUCT DATASHEET

HQL LED 13000 lm 95 W/4000 K E40

HQL LED PRO | LED replacement for HID lamps for outdoor application



Areas of application

- Streets
- Area lighting
- Pedestrian zones
- Parks
- Outdoor applications only in suitable luminaires

Product benefits

- Saves up to 78 % energy when used as replacement for mercury vapor lamps (HQL)
- Low maintenance costs thanks to long lifetime
- Instant 100 % light, no warm-up time

Product features

- Replacement for HQL: Suitable for operation with conventional control gear (CCG) for HQL or 230 V mains
- Replacement for other HID: Suitable for operation with line voltage without control gear
- Power factor: 0.9
- Type of protection: IP65
- High surge protection: up to 6 kV (L-N)



TECHNICAL DATA

Electrical data

Nominal wattage	95 W
Construction wattage	95.00 W
Nominal voltage	220...240 V
Claimed equiv. conventional lamp power	250 W
Nominal current	425 mA
Type of current	AC
Inrush current	8.6 A
Operating frequency	50/60 Hz
Mains frequency	50/60 Hz
Max. lamp no. on circuit break. 10 A (B)	13
Max. lamp no. on circuit break. B10 A - CCG without compensation	13
Max. lamp no. on circuit break. B10 A - CCG with compensation	17
Max. lamp no. on circuit break. 16 A (B)	20
Max. lamp no. on circuit break. B16 A - CCG without compensation	20
Max. lamp no. on circuit break. B16 A - CCG with compensation	26
Total harmonic distortion	20 %
Power factor λ	0.90

Photometrical data


Luminous flux	13000 lm
Nominal useful luminous flux 90°	13000 lm
Luminous efficacy	136 lm/W
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Cool White
Color temperature	4000 K
Color rendering index Ra	≥80
Light color	840
Standard deviation of color matching	≤6 sdcM
Rated LLMF at 6,000 h	0.80

Light technical data

Beam angle	360 °
Warm-up time (60 %)	< 0.50 s

Starting time	< 0.5 s
Rated beam angle (half peak value)	360.00 °

Dimensions & Weight

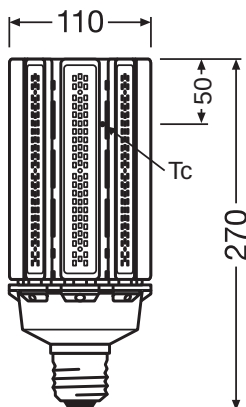

Overall length	270.00 mm
Diameter	110,0 mm
Maximum diameter	110 mm
Product weight	1400.00 g

Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Maximum temperature at tc test point	94 °C

Lifespan

Nominal lamp life time	50000 h
Number of switching cycles	100000
Lumen maintenance at end of serv	0.70
Rated lamp survival factor at 6,000	≥ 0.90

Additional product data

Base (standard designation)	E40
Mercury content	0.0 mg
Mercury-free	Yes
Design / version	Clear

Capabilities

Dimmable	No
----------	----

Certificates & Standards

Energy efficiency class	A++ 1)
Energy consumption	95.00 kWh/1000h
Type of protection	IP65
Standards	CE
Photobiological safety group acc. to EN62778	RG1

1) Energy efficiency class (EEC) on a scale of A++ (highest efficiency) to E (lowest efficiency)

Country-specific categorizations

Order reference	HQLLED13000 95W
-----------------	-----------------

LOGISTICAL DATA

Temperature range at storage	-20...+80 °C
------------------------------	--------------



Energy labelling regulation data acc EU 2019/2015

Light source cap-type (or other electric interface)	E40
Length	270.00 mm
Height	110,0 mm
Width	110,0 mm

Safety advice

- The bulb may be larger and heavier than the replaced bulb. Before installation it must be checked, if the luminaire and especially the holder is capable of carrying the weight of the lamp. If possible, please install the safety rope included in the package containing the lamp for the types 90 W lamps.
- Not suitable for operation with ignitors
- Operation on the capacitor can lead to a reduction of the power factor of the system.
- When installed horizontally, the t_c point of the lamp is located on the top side of the lamp.
- Use in tight luminaires and luminaires with tight reflectors not recommended.

DOWNLOAD DATA

DOWNLOAD DATA	
	User instruction HQL LED PRO
	PRODUCT DATASHEET HQL LED 13000 lm 95 W 4000K E40 DATASHEET

DOWNLOAD DATA



Declarations of conformity
CE Declaration of Conformity HQL



IES file (IES)
AC21058_HQLLED13000 95W 230VPROE40



LDT file (Eulumdat)
AC21058_HQLLED13000 95W 230VPROE40

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075124981	Folding box 1	117 mm x 117 mm x 301 mm	1518.00 g	4.12 dm ³
4058075124998	Shipping box 6	360 mm x 245 mm x 326 mm	9524.00 g	28.75 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.